


MERCER Precision Dial Gauges

∅ 58 mm – Standard Series S

Movement with stainless steel rack teeth, hardened and ground, as well as hard-wearing gear.

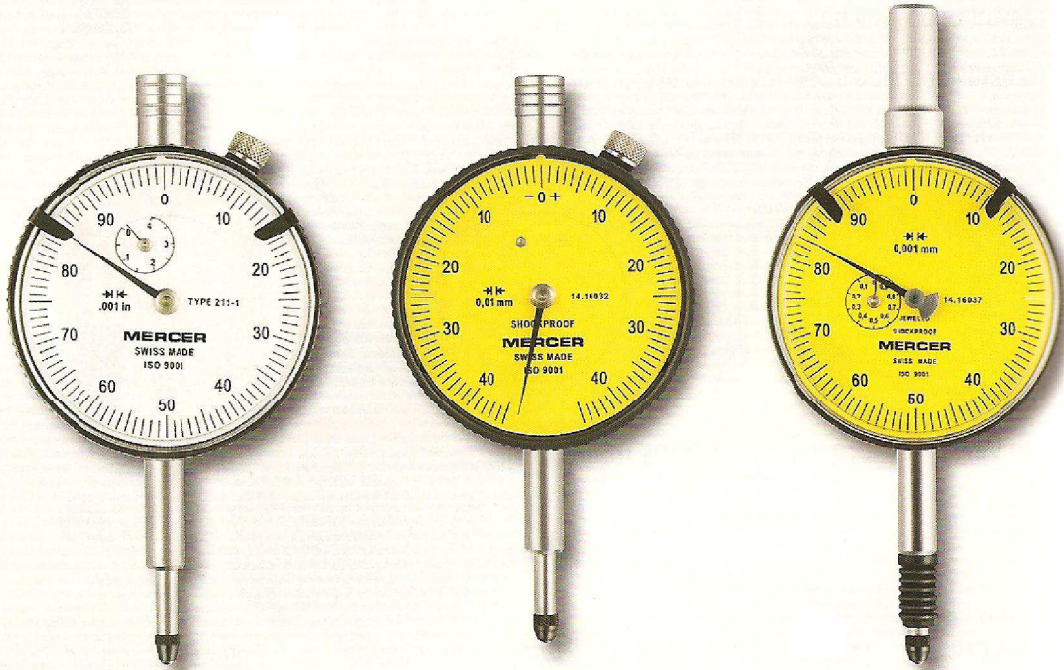

Inch Versions - 0.001 in or 0.0005 in Reading

		in	in	in		in			N
<i>Regular models</i>									
01426026	210-1	0.001	0.400	0.420	without	0.1	0 ÷ 50 ÷ 0		≤ 1,4
01426027	211-1	0.001	0.400	0.420	without	0.1	0 ÷ 50 ÷ 100		≤ 1,4
01426020	212-1	0.0005	0.400	0.420	without	0.05	0 ÷ 25 ÷ 0		≤ 1,4
01426021	213-1	0.0005	0.400	0.420	without	0.05	0 ÷ 25 ÷ 50		≤ 1,4
01426028	240-1	0.0001	0.200	0.210	without	0.01	0 ÷ 50 ÷ 0		≤ 1,7
01426029	241-1	0.0001	0.200	0.210	without	0.01	0 ÷ 50 ÷ 100		≤ 1,7

Metric Versions - 0,01 mm, 0,002 mm or 0,001 mm Reading

		mm	mm	mm		mm			N
<i>Regular models</i>									
01416020	250-1	0,01	10	10,5	without	1	0 ÷ 50 ÷ 0		≤ 1,4
01416021	251-1	0,01	10	10,5	without	1	0 ÷ 50 ÷ 100		≤ 1,4
01416034	253-1	0,002	5	5,3	without	0,2	0 ÷ 10 ÷ 0		≤ 1,7
01416035	254-1	0,002	5	5,3	without	0,2	0 ÷ 10 ÷ 20		≤ 1,7
<i>Model with restricted reading range</i>									
01416032		0,01	0,8	4,0	with		40 ÷ 0 ÷ 40		≤ 1,4
<i>Models IP54 protected against the penetration of liquids</i>									
01416016		0,01	10	10,5	without	1	0 ÷ 50 ÷ 100		≤ 2,2
01416037		0,001	1	3,3	with	0,1	0 ÷ 50 ÷ 100		≤ 2

